




Specifications for EMH Style DLVM-125 Single Girder Under Running End Trucks 5.125 In. Diameter Wheels

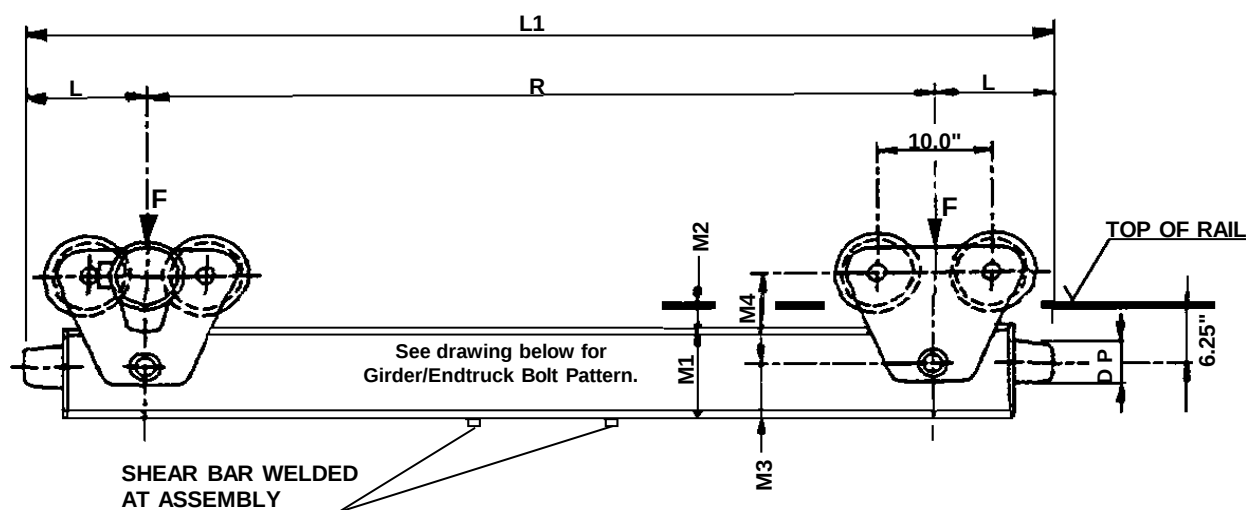

Girder/Endtruck Bolt Pattern

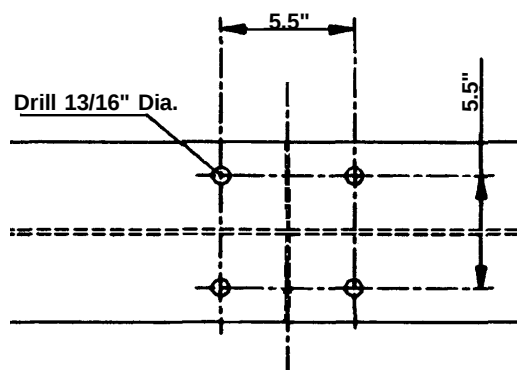

Girder Flange : Bolt Pattern
< OR = TO 8" 4.5"
>8 5.5"

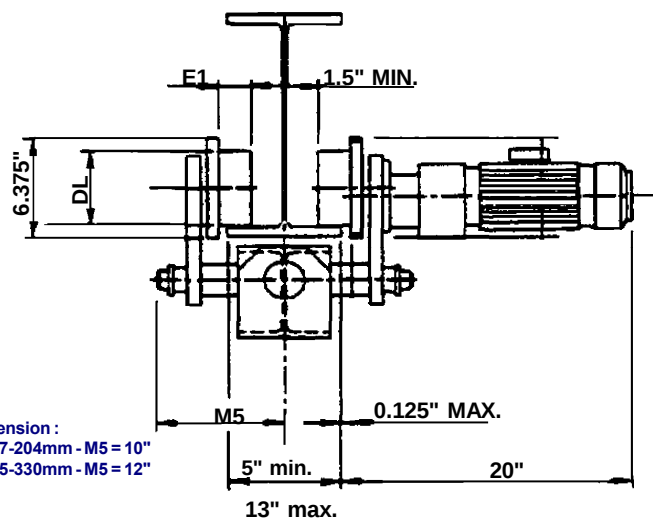

M5 Dimension :
 if FW 127-204mm - M5 = 10"
 if FW 205-330mm - M5 = 12"

**Consult EMH for wider flange or
patented track.**

Model No.	Wheel Base (R) Ft.-In.	Corner Load Lbs. (F)	Movable Mass Lbs.	Endtruck Load Max. Lbs.	120 fpm Motor HP	Max Span Ft.	Wt. Lbs.	L In.	L1 Ft.-In.	DL In.	DP In.	E1 In.	M1 In.	M2 In.	M3 In.	M4 In.	M5 In.
D-125.250.1500.1	5-0	9,800	23,000	19,600	0.75	39	660	13	7-2	5	4	1.375	8.5	2	5.25	7.5	varies
D-125.250.2000.1	6-6	9,800	23,000	19,600	0.75	52	760	13	8-8	5	4	1.375	8.5	2	5.25	7.5	varies
D-125.250.2300.1	7-6	9,800	23,000	19,600	0.75	64	825	13	9-8	5	4	1.375	8.75	1.75	5.5	7.5	varies